


# Common Accessories - Thermiser® Insulated Doors


## Locking

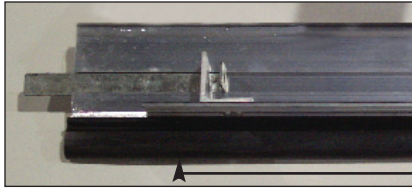

### Slide Bolt Lock, Aluminum Bottom Bar


Extruded aluminum angular shape with roll formed front cover and foamed in place insulation with a locking device equipped for padlocking from coil side of curtain.

Photo also shows Bottom Bar Astragal, which is provided as standard.

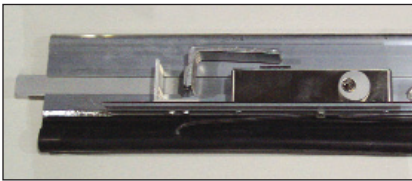

### Cylinder Lock, Aluminum Bottom Bar

Extruded aluminum angular shape with roll formed front cover and foamed in place insulation with key-lockable slide bolt at either end of the bottom bar.

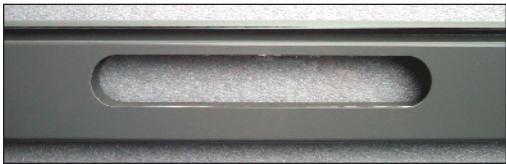

## Vision Windows

Provide visibility with one or more panes incorporated in the curtain with placement, quantity and layout to be set by specifier. Each pane is 10" x 1 1/2", spaced a minimum of 6" apart. Minimum spacing in from each guide is 12".

## Weathering



### Weatherstrip on Guide - provided as standard

A replaceable vinyl weather-stripping on guide forms a weather seal with exterior surface of door curtain preventing air seepage through the guide.



### Lintel Seal - provided as standard

Nylon brush seal within a retainer that is mounted at the door header to impeded airflow at lintel.



### Optional Hood Baffle

Rubber baffle that conforms to coil size to impede airflow above the coil.

**Note** that Bottom Bar Astragal Seal, shown above in Locking, is provided as standard.