


Common Accessories - Service Doors

Locking

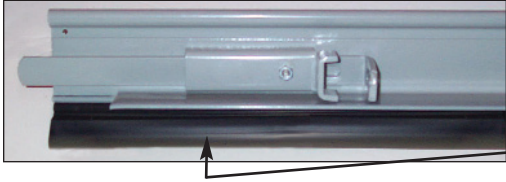

Slide Bolt Lock

Bottom bar locking device equipped for padlocking from coil or fascia side of curtain. Normally provided at both ends of bottom bar.

Photo also shows Bottom Bar Astragal, which is provided as standard.



Angle Bottom Bar Cylinder Lock

Angle bottom bar with key-lockable slide bolt. Can be provided at both ends of bottom bar, or at one end with a slide bolt lock at the other end when operation is from the coil side. Cylinder locks provided at both ends of bottom bar when operation is from the fascia or both sides.




Extruded Tubular Bottom Bar Cylinder Lock

Extruded aluminum angular shape with hinged extruded trim with center mounted key-lockable turn handle locking device operable from coil, fascia or both sides.



Vision Windows

Provide visibility with one or more panes incorporated in the curtain with placement, quantity and layout to be set by specifier. Each pane is 10" x 1 5/8", spaced a minimum of 2" apart. Minimum spacing in from each guide is 12".

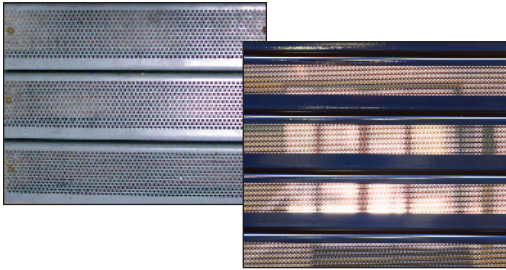

ScreenGard™ Perforated Curtain Slats

20 gauge, galvanized steel slat with tiny circular perforations allowing for a 22% open curtain. Provides security while allowing visibility and ventilation. Prevents infusion of litter while providing rodent and insect protection.

Weathering Options



Weatherstrip on Guide

A replaceable vinyl weather-stripping on guide forms a weather seal with exterior surface of door curtain preventing air seepage through the guide.



Hood Baffle in Hood

Rubber baffle that conforms to coil size to impede airflow above the coil.



Lintel Seal

Nylon brush seal within a retainer that is mounted at the door header to impeded airflow at lintel.

Note that Bottom Bar Astragal Seal, shown above in Locking, is provided as standard.